




Since 1962



INDIA'S MOST RELIABLE  
**DESIGNER TILES**  
& STONE COMPANY

[www.thestonepeople.in](http://www.thestonepeople.in)







*Heavenly*  
Excellence

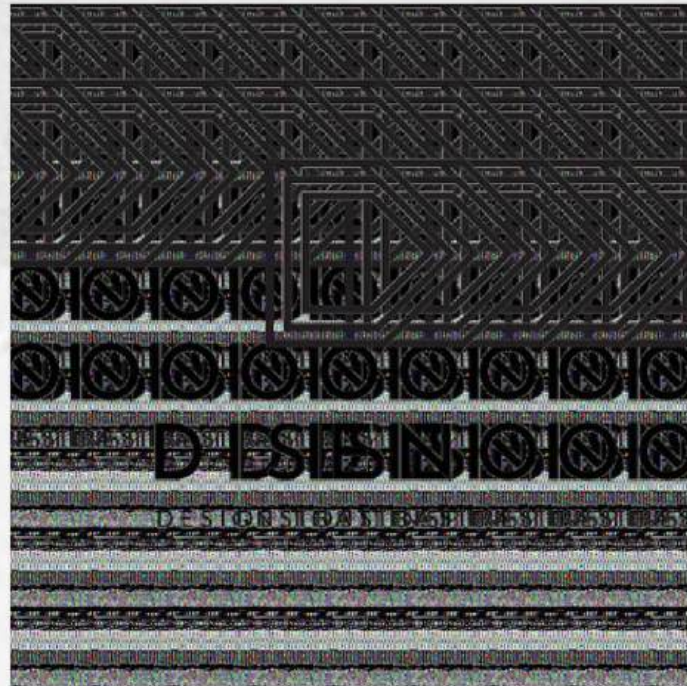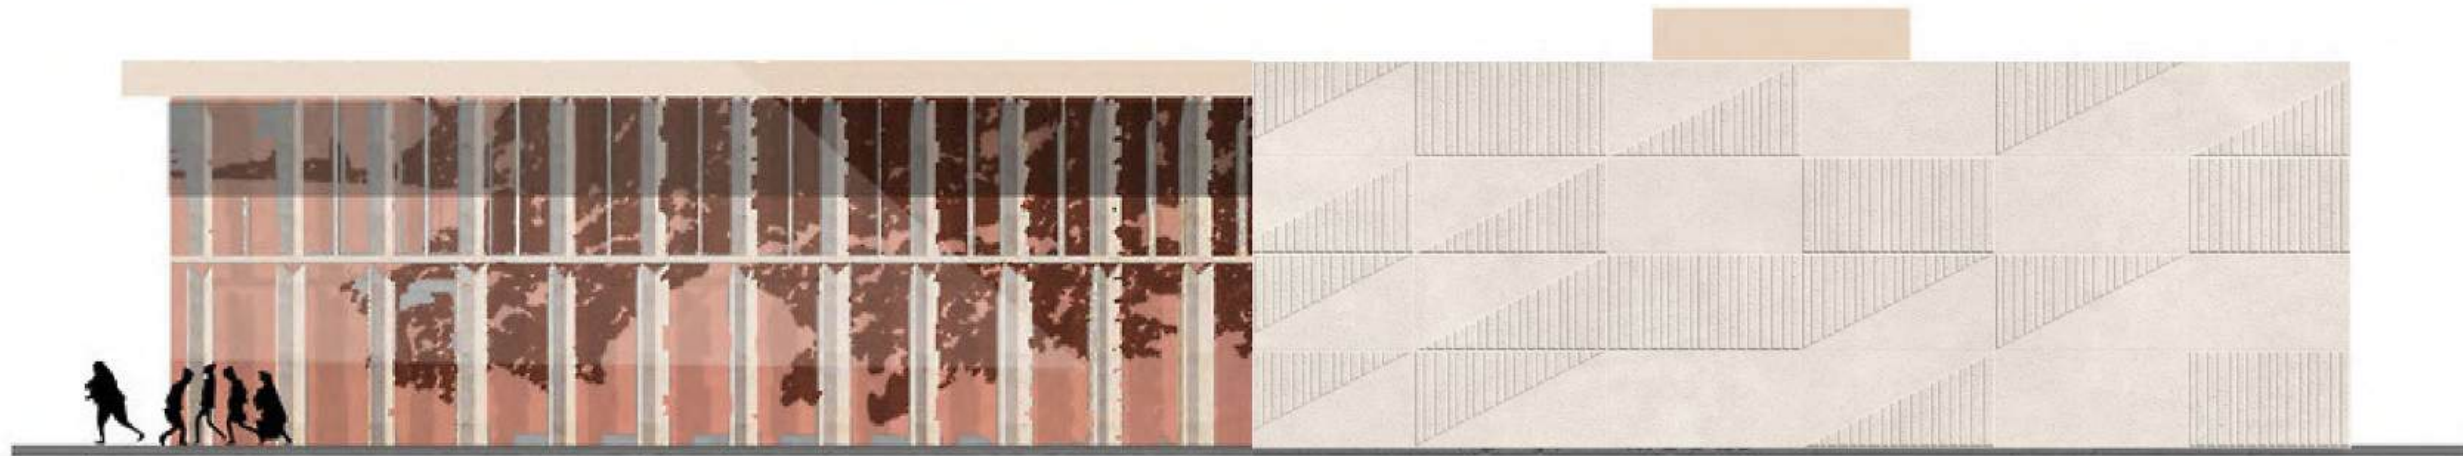


The style of dignity



WALL COVERINGS




RESIDENTIAL HOME



PUBLIC SPACES




WET AREAS




PERFECT MATCH

Application in three dimensions for your place.

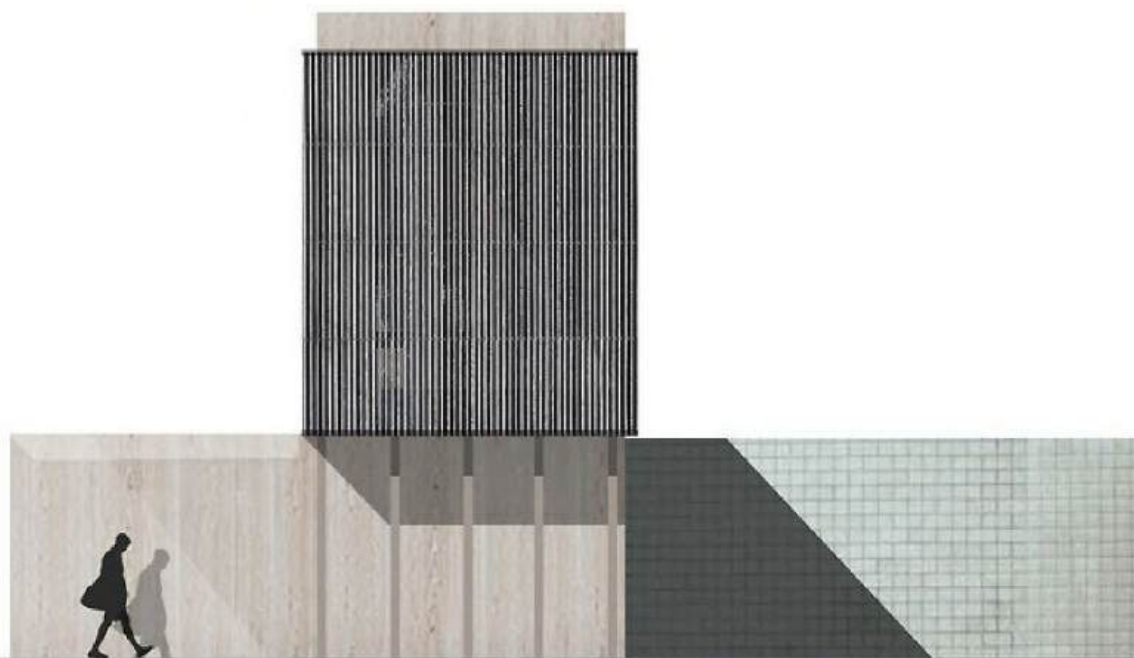




Application in four modules for your place.

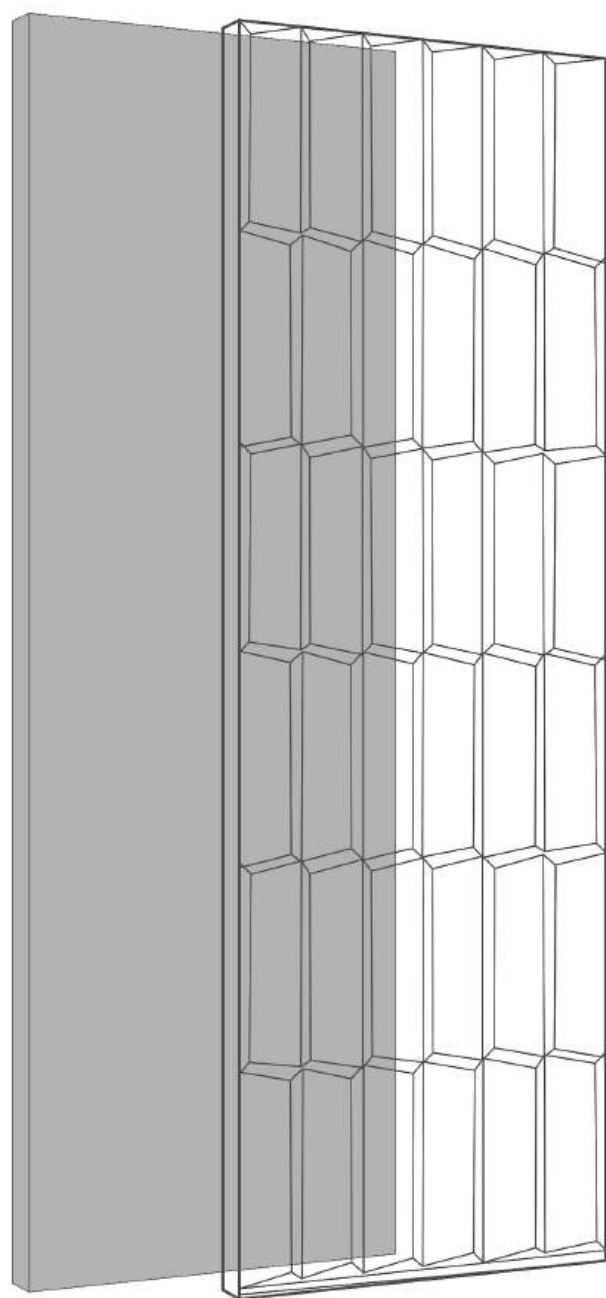

THICKNESS : 9MM

SIZE

400x1200MM

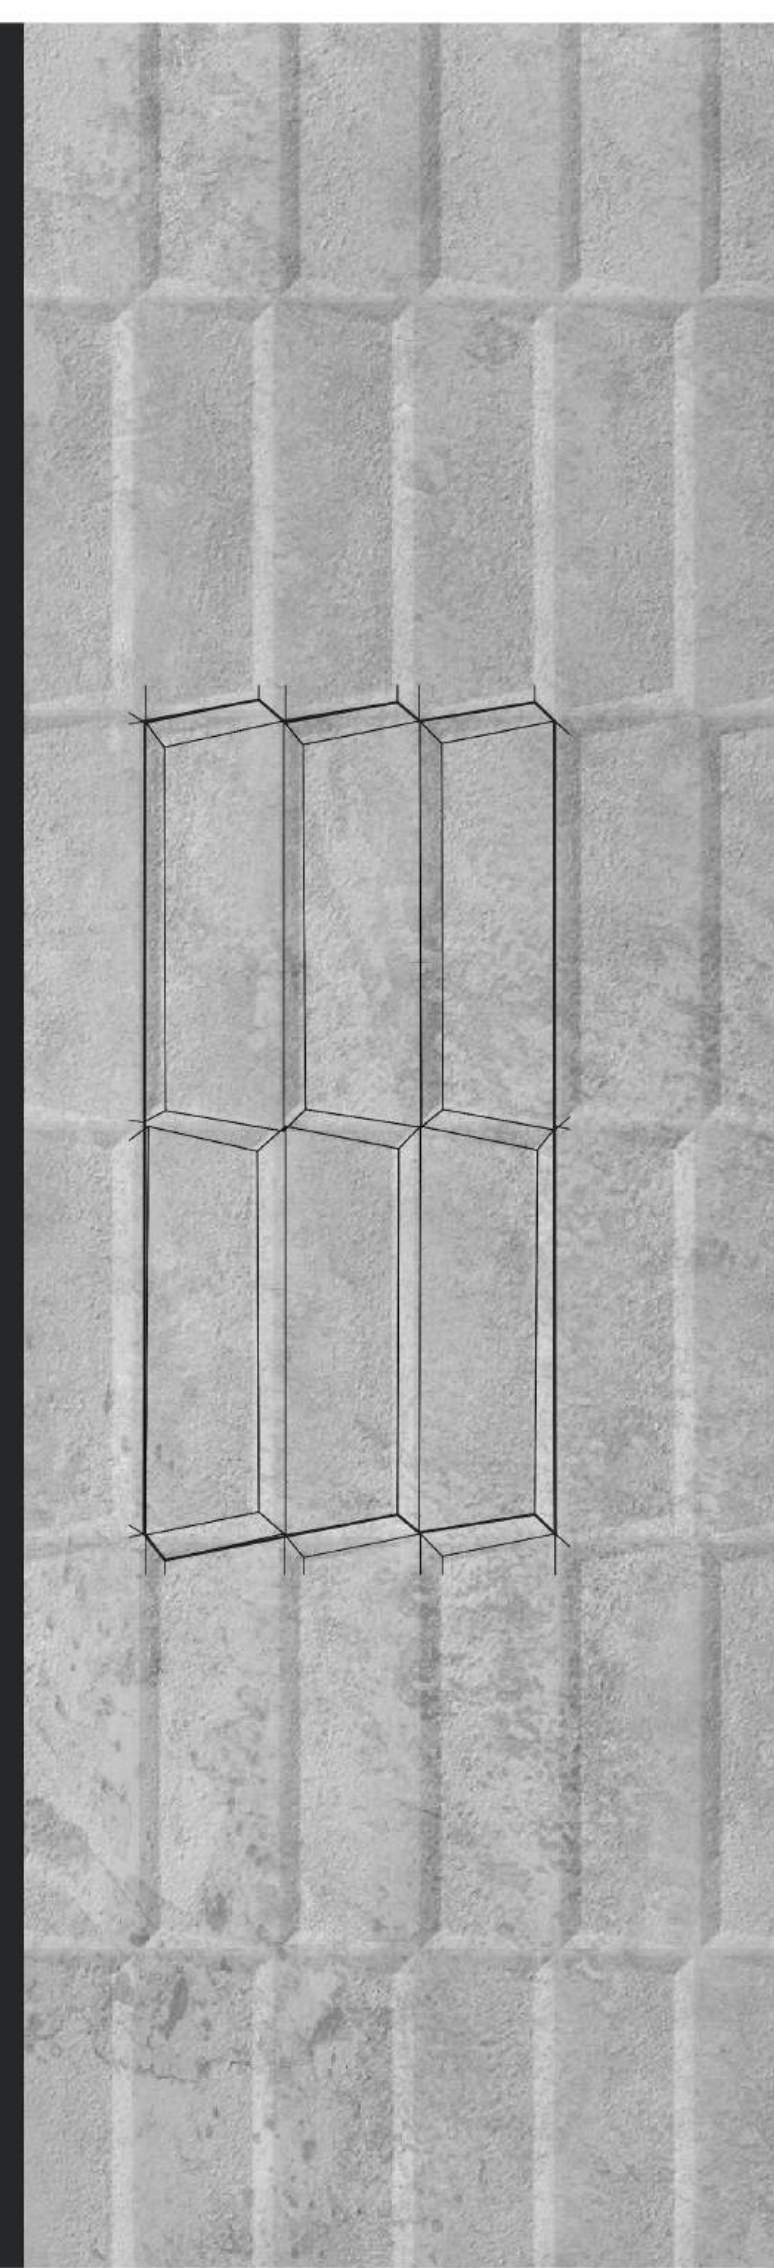

# Ceramics: a choice you can rely on.


^  
**VOC FREE**




Formaldehyde-free



Asbestos-free




Chlorine-Free



Thermal Resistance



Frost resistance



Waterproof



Scratch Resistance



Fire Resistance



Easy to clean

Does not contain volatile organic compounds





AVENUE BIANCO & AVENUE BIANCO WAVES

## AVENUE SERIES

AVENUE BIANCO



AVENUE GREY



AVENUE NERO


AVENUE BIANCO WAVES



AVENUE GREY WAVES



AVENUE NERO WAVES

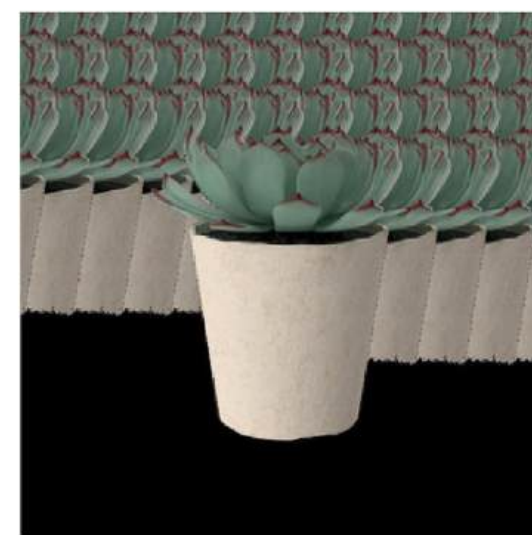

The precious  
**UNIQUENESS**

GVT / PGVT **400X1200MM**  
THICKNESS: 9MM



AVENUE NERO & AVENUE NERO WAVES



AVENUE GREY & AVENUE GREY WAVES

# AVENUE SERIES



AVENUE IVORY




AVENUE IVORY WAVES



AVENUE SEPIA



AVENUE SEPIA WAVES

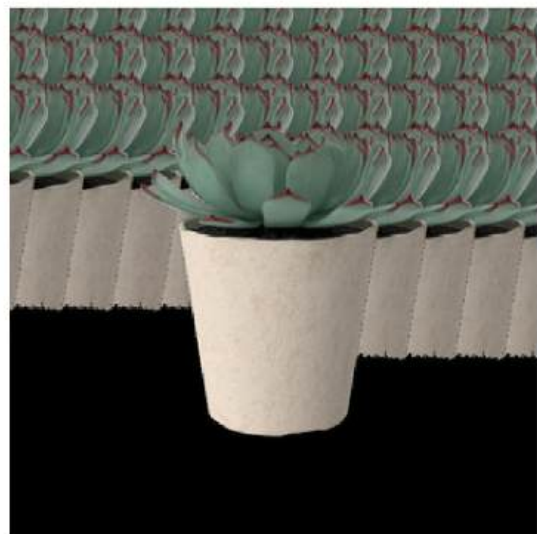

The precious  
**UNIQUENESS**

GVT / PGVT 400X1200MM  
THICKNESS : 9MM



AVENUE SEPIA & AVENUE SEPIA WAVES



# ELEMENT SERIES




ELEMENT CEMENTO SLATE

R-6




ELEMENT GREY SLATE

R-6

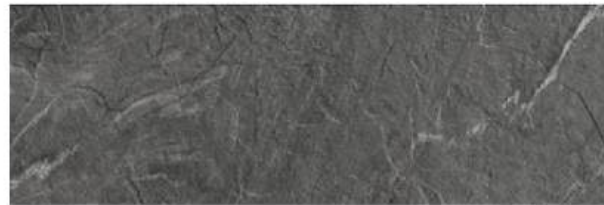

ELEMENT ANTHRACITE SLATE

R-6

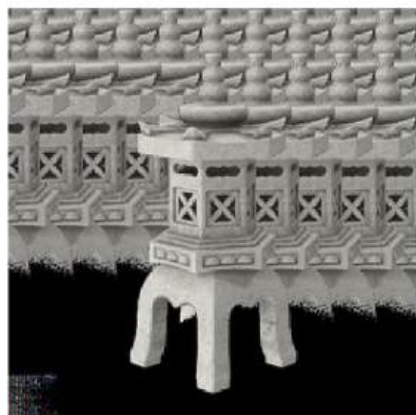

GVT / PGVT 400X1200MM  
THICKNESS: 9MM



ELEMENT GREY SLATE



EMERALD NERO RUST & EMERALD NERO DELTA

## EMERALD SERIES




EMERALD CEMENTO RUST

R-6



EMERALD NERO RUST

R-6

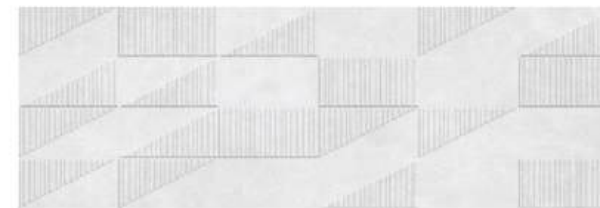

EMERALD CEMENTO DELTA



EMERALD NERO DELTA



IMPOSING

GVT / PGVT 400X1200MM  
THICKNESS 9MM



EMERALD CEMENTO RUST & EMERALD CEMENTO DELTA



EMERALD NERO & EMERALD NERO GEO

# EMERALD SERIES



EMERALD CREMA RUST


R-6



EMERALD CREMA DELTA

**CREATIVITY**  
TAKES COURAGE

GVT / PGVT 400X1200MM  
THICKNESS: 9MM

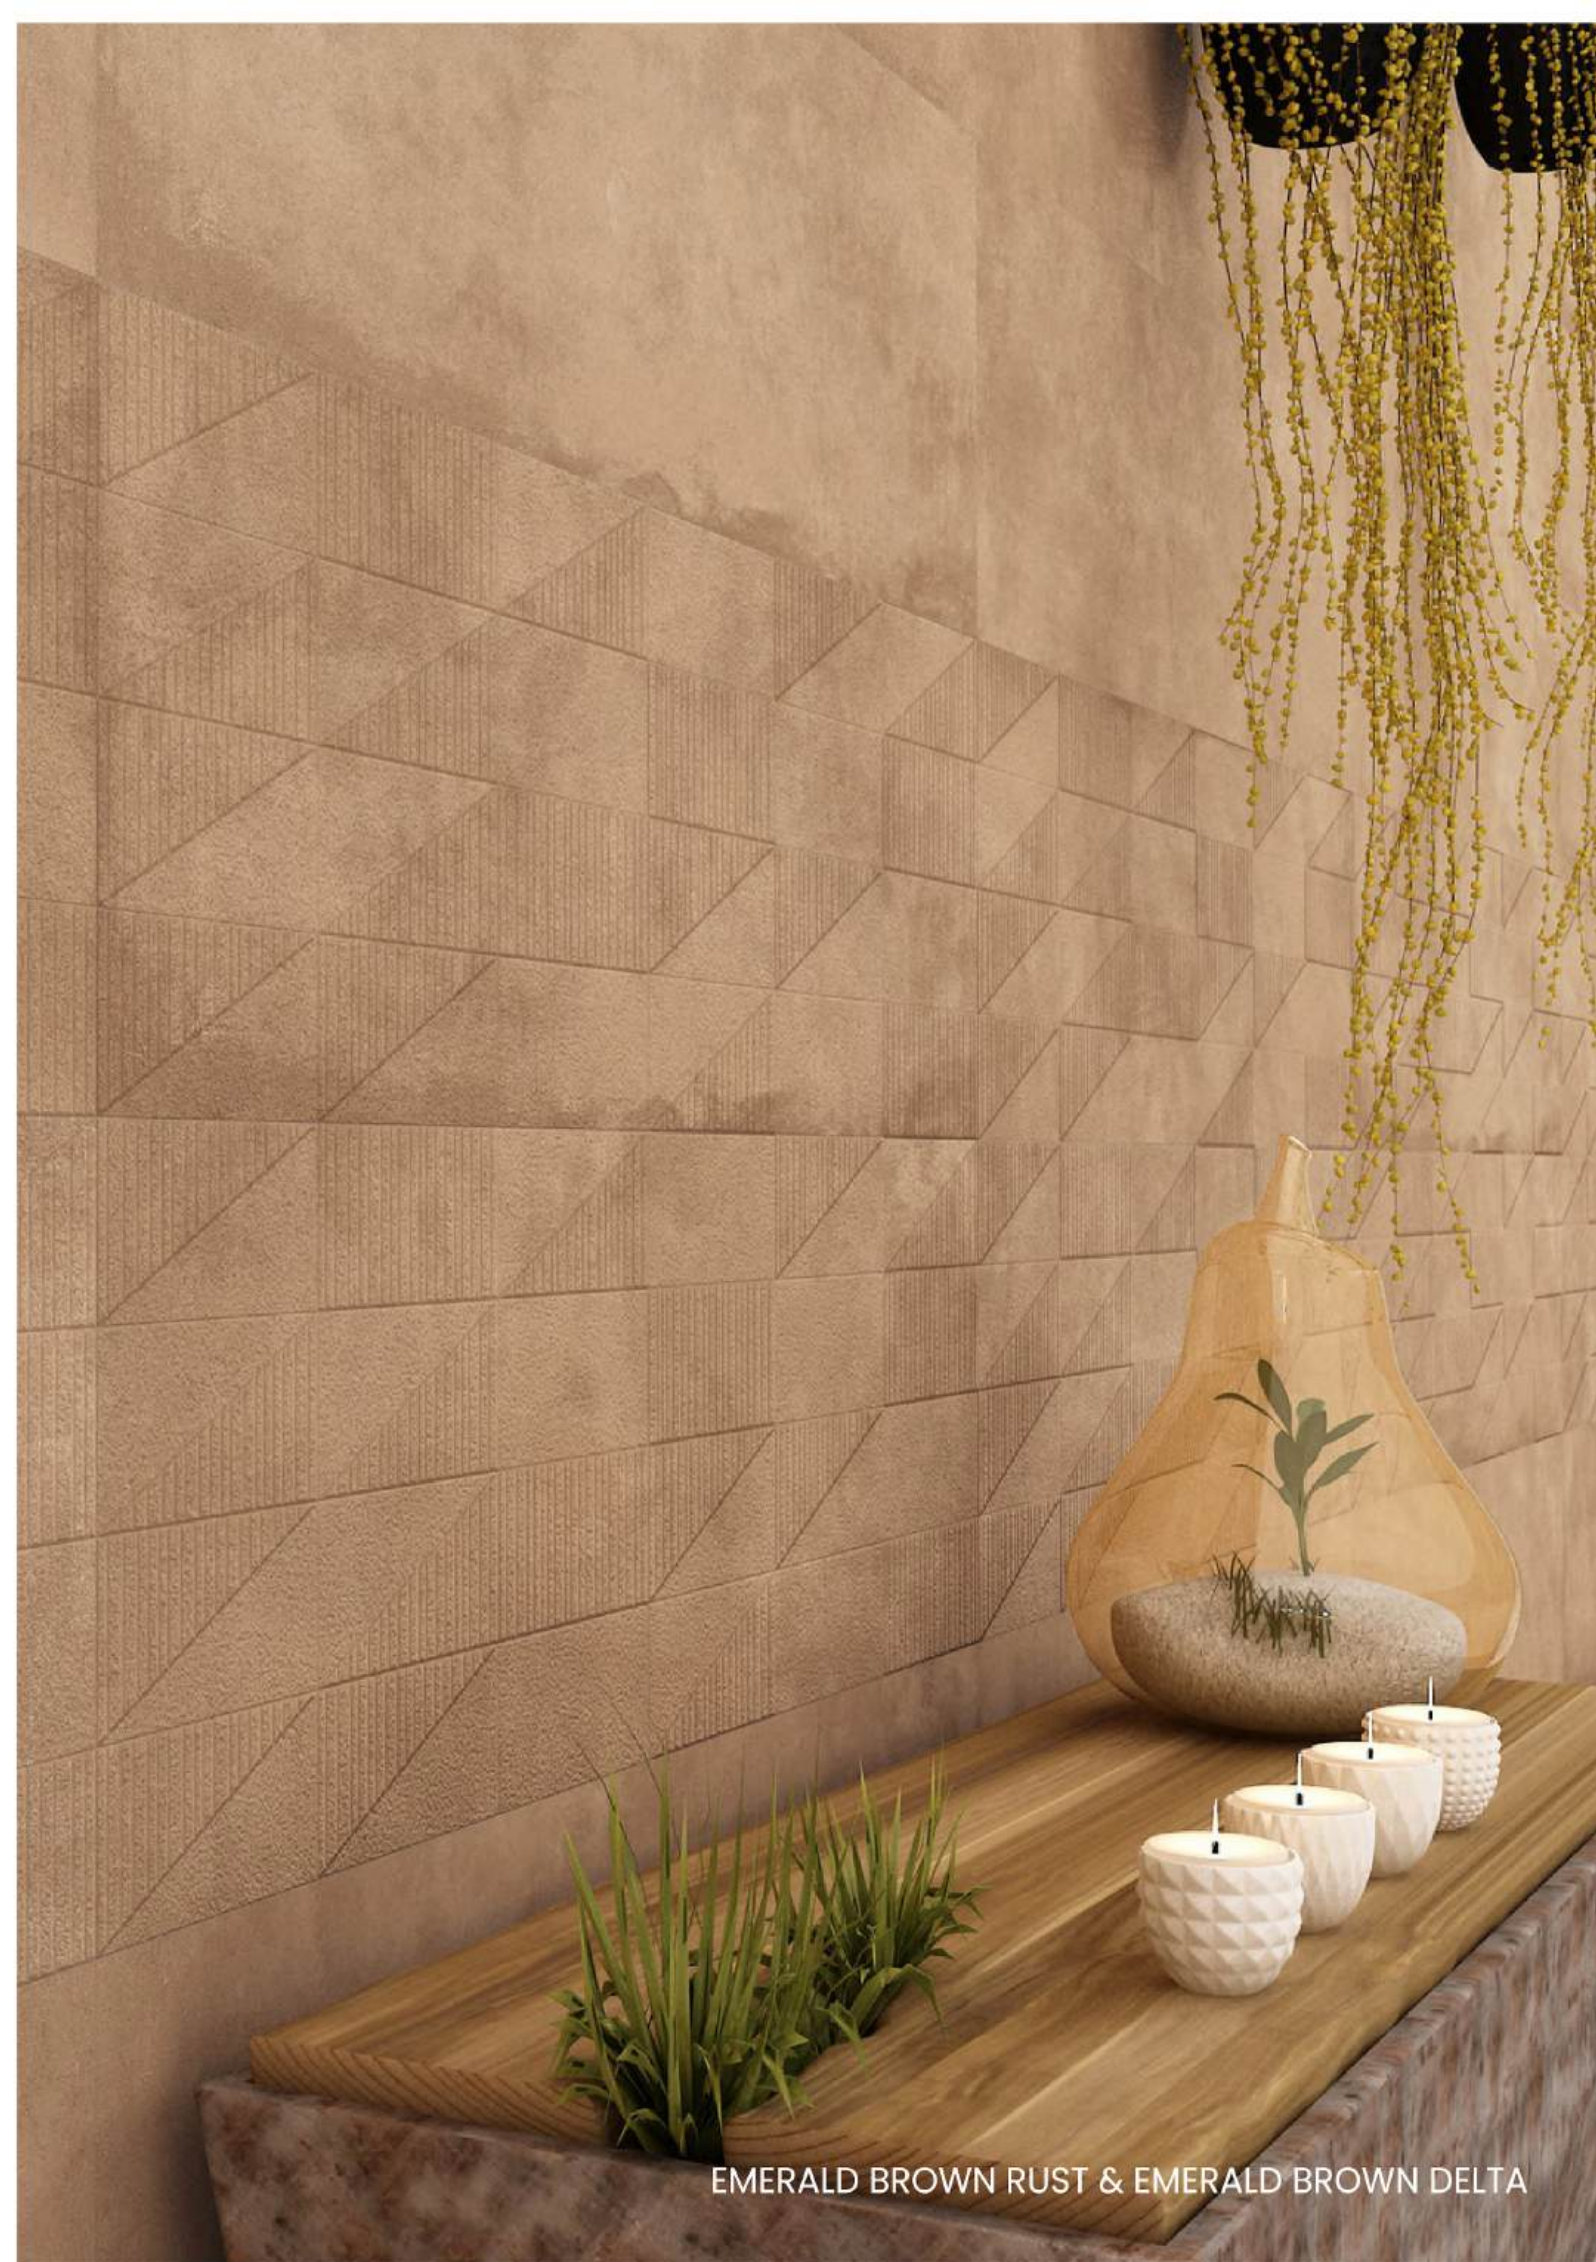

EMERALD BROWN RUST & EMERALD BROWN DELTA



TITANIUM NERO & TITANIUM NERO DIAMOND


# TITANIUM SERIES



TITANIUM CEMENTO R-4




TITANIUM NERO R-4

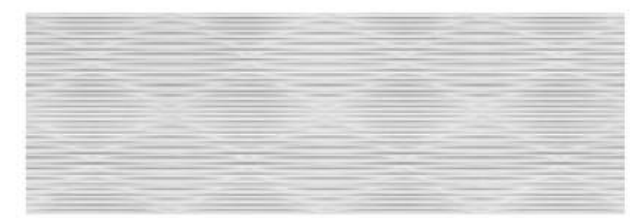

TITANIUM CEMENTO DIAMOND



TITANIUM NERO DIAMOND

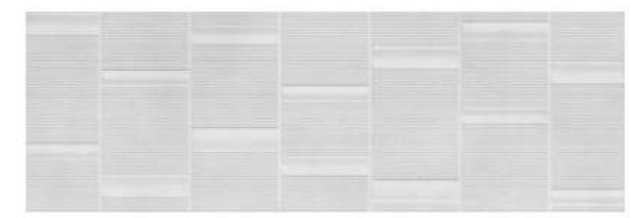

TITANIUM CEMENTO SEGMENT



TITANIUM NERO SEGMENT



IMPRESSIVE

GVT / PGVT 400X1200MM  
THICKNESS 9MM



TITANIUM CEMENTO & TITANIUM CEMENTO DIAMOND



TITANIUM NERO & TITANIUM NERO SEGMENT

# TITANIUM SERIES

TITANIUM CREMA

R-4



TITANIUM CREMA DIAMOND



TITANIUM CREMA SEGMENT



TITANIUM TAUPE

R-4



TITANIUM TAUPE DIAMOND



TITANIUM TAUPE SEGMENT

## MAJESTIC DESIGNS

GVT / PGVT 400X1200MM  
THICKNESS : 9MM



TITANIUM CREMA & TITANIUM CREMA SEGMENT





TITANIUM CREMA & TITANIUM CREMA SEGMENT



TITANIUM TAUPE & TITANIUM TAUPE DIAMOND




# TECHNICAL SPECIFICATION

CHARACTERISTIC	STANDARD AS PER ISO-13006 / En14411 GROUP Bia	VALUE	TEST METHOD
<b>REGULATORY PROPERTIES</b> Deviation in			
length & width Deviation in thickness	±0.5%	±0.3%	ISO-10545-2
Straightness in side Rectangularity Surface	±0.5%	±4.0%	ISO-10545-2
flatness Color difference Glossiness	±0.5%	±0.1%	ISO-10545-2
<b>STRUCTURAL PROPERTIES</b> Water			
absorption Apparent density MASSIVE	±0.5%	±0.2% No	ISO-10545-2
<b>MECHANICAL PROPERTIES</b> Modulus of			
repture Breaking strength Impact	As per mfg.	Min 90%	GLOSSO METER
<b>resistance SURFACE MECHANICAL</b>			
PROPERTIES Resistance to surface	<0.50%	<0.05%	ISO-10545-3
abrasion (PEI RATING) MOH's hardness	>2 .0g /cc	>2.10g/cc	DIN 51082
<b>THERMO HYGROMRTRIC PROPERTIES</b>			
Frost resistance Thermal shock resistance	Min. 35 N/mm2	Min. 40 N/mm2	ISO-10545-4
Moisture expansion Thermal	Min.1300 N	Min. 1800 N	ISO-10545-4
expansion(COE) Crazing resistance	As per mfg.	Min. 0.55	ISO-10545-5
<b>CHEMICAL PROPERTIES</b> Chemical			
resistance Stain resistance SEFETY	As per mfg.	Min. Class-4	ISO-10545-7
PROPERTIES Slip resistance Fire resistance	As per mfg.	Min. 5	EN 101
Lead & Cafmium given off by glazes tiles			
	No damage	No damage	ISO-10545-12
	No damage	No damage	ISO-10545-9
	Nil Max.	Nil Max.	ISO-10545-10
	9.0x10 <sup>-1</sup> As	6.5x10 <sup>-1</sup> Min.	ISO-10545-8
	per mfg.	10 Cycle	ISO-10545-11
	No damage	No damage	ISO-10545-13
	Min. Class3	Class 5	ISO-10545-14
	As per mfg.	>0.40	ISO-10545-17
	As per mfg.	Fireproof	N.A. ISO-10545-15
	As per mfg.	Does not yield Pb & Cd	

The information contained in this catalogue is as accurate as possible, but cannot be considered as legally binding. The Company reserves the right to make any modification that becomes necessary due to production requirements. Weight, colors, and dimensions are subject to the inevitable variation typical of the ceramic firing process. The colors are possible to the actual colors, within the limits allowed by the printing process. For technical printing reasons, the colors shown may slightly differ from the actual tiles.

## PACKAGING DETAILS

Dimensions	Thickness (approx.)	Tiles/ Box	Coverage Area / Box	Avg. Weight/ Box (approx.)
400x1200mm	9mm	3pcs	155 <sup>sq</sup> ft	29 k.g.

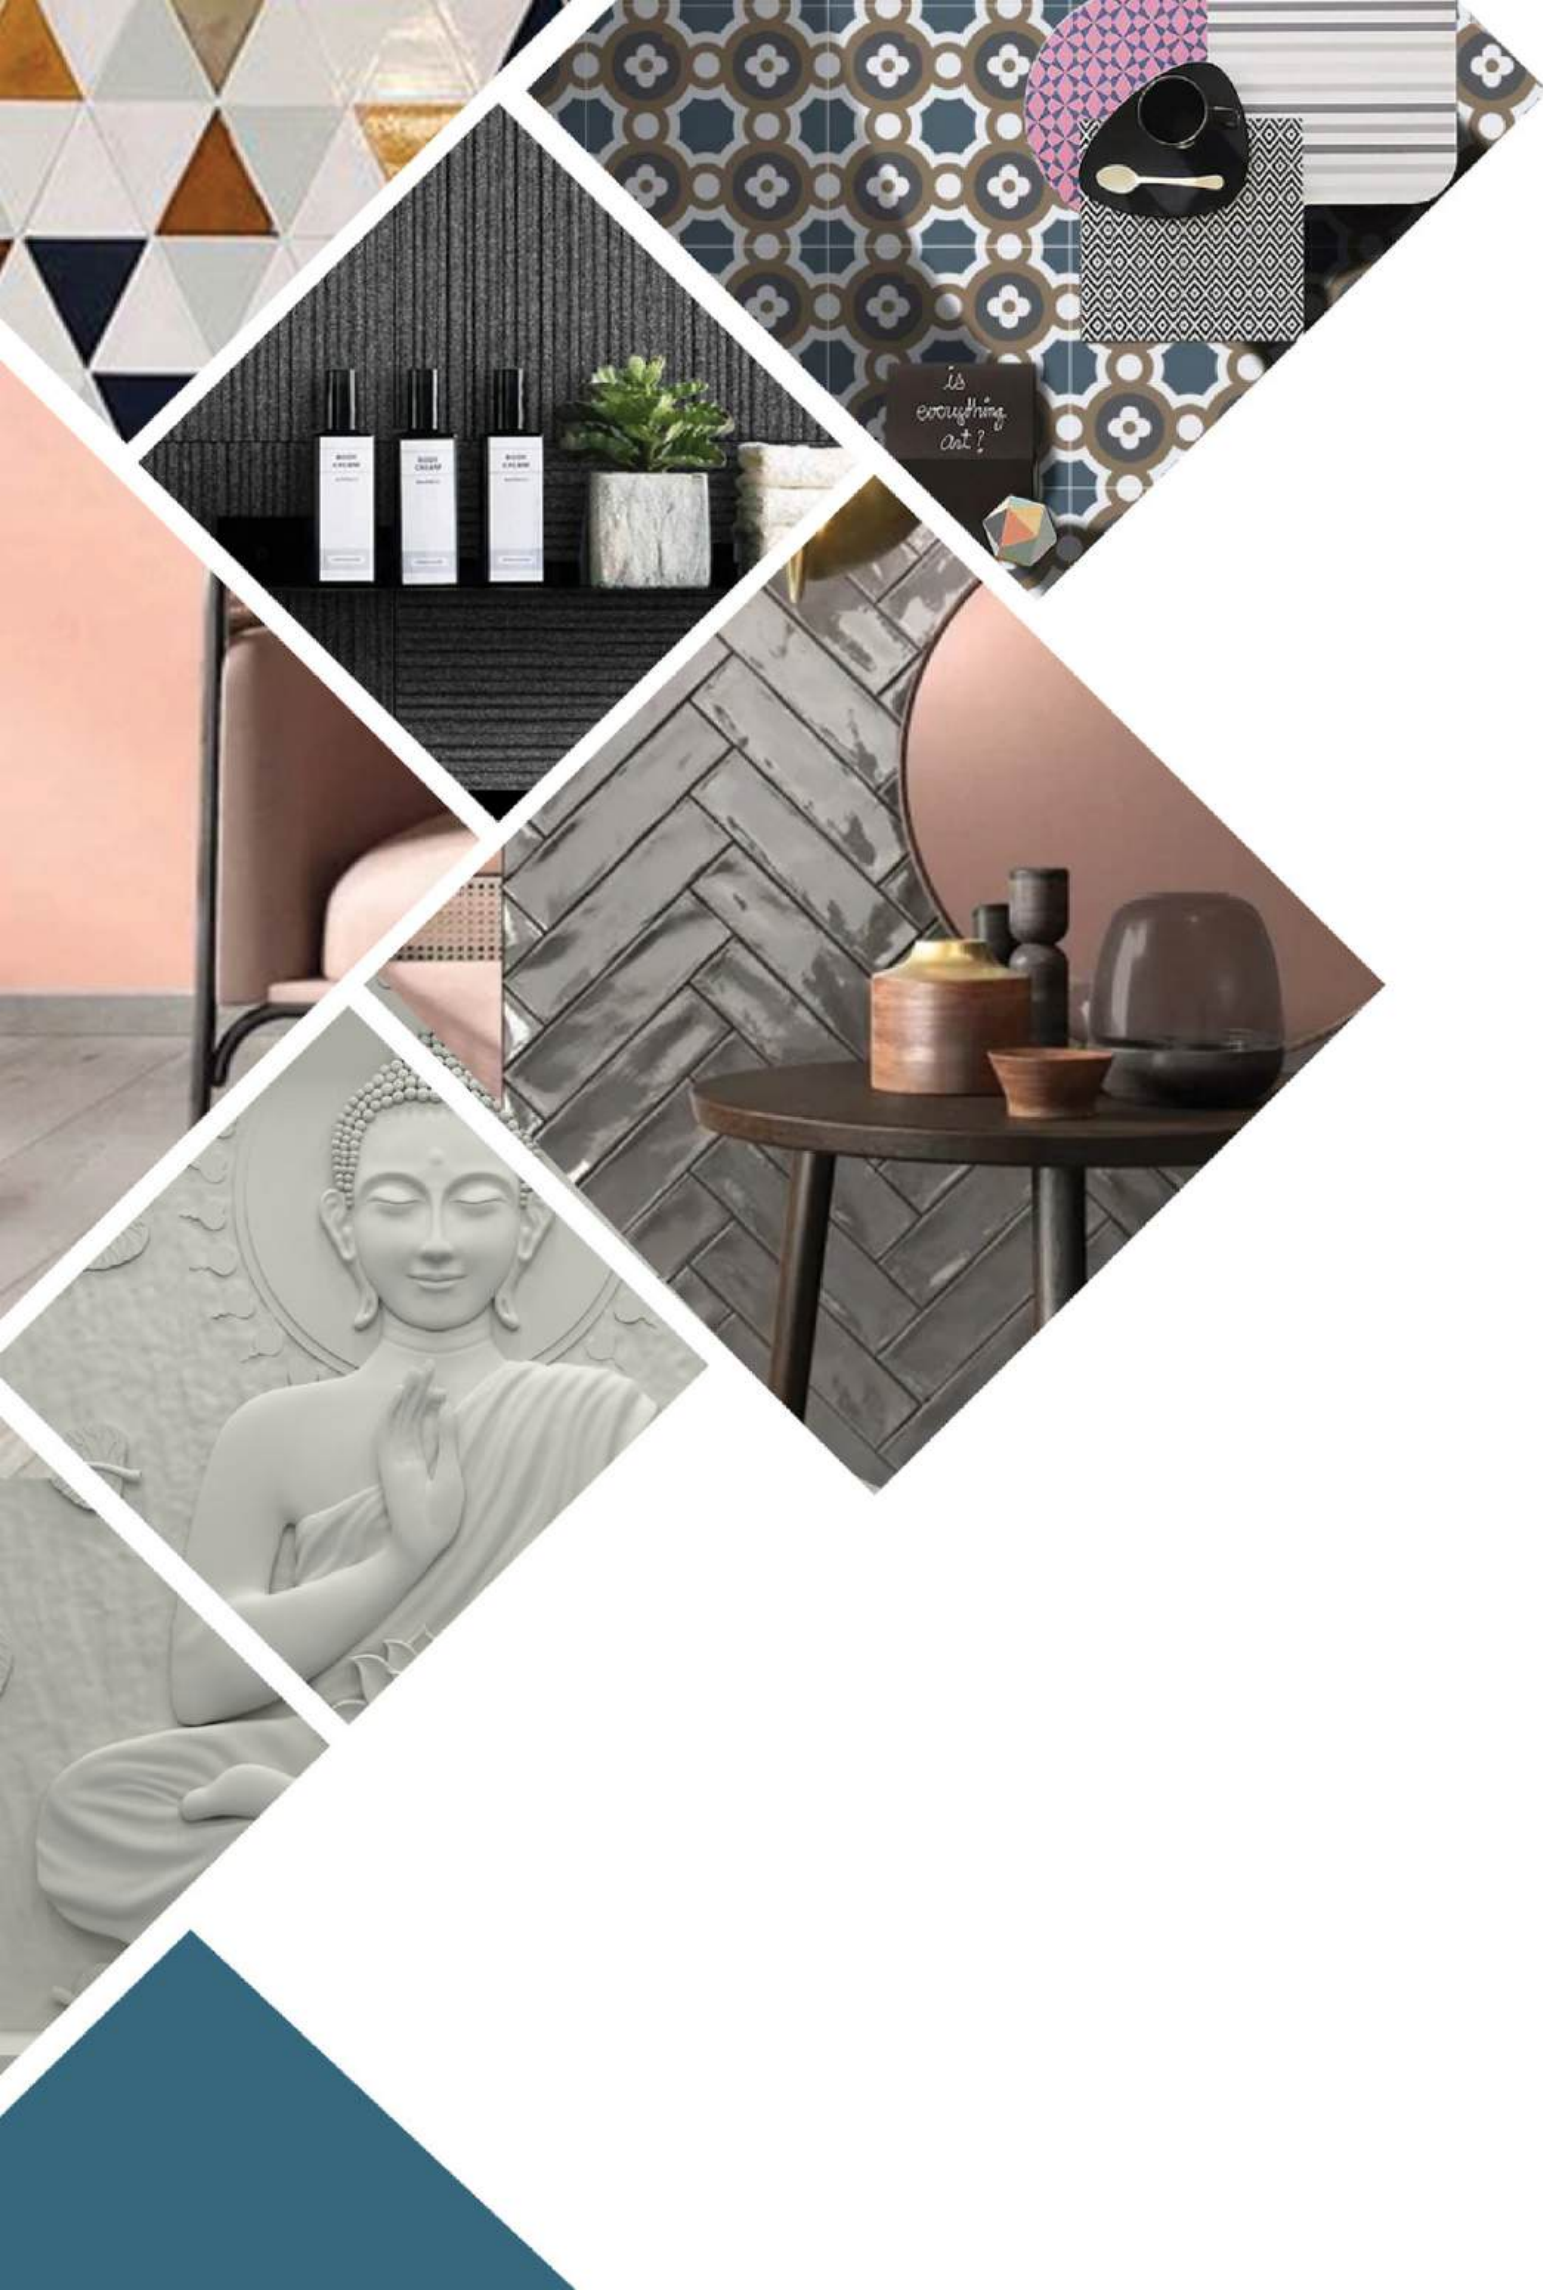

## **THE STONE PEOPLE**

D - 200, Marble Market,  
Mansarovar Garden,  
New Delhi - 110015.  
INDIA.

+91 11 2511 1111 | +91 98739 39391  
stonepeopleindia@gmail.com

[www.thestonepeople.in](http://www.thestonepeople.in)